


COC-1 Self Contained Power Connector Installation Instructions For 2 Wire Cable With Ground Applications

The 2-circuit-with-ground connectors will splice non-metallic-sheathed cable in the following wire ranges and types:

Self Contained Connector - 2 Circuit with ground for Solid Wire

Wire Range AWG	Order No.	Optional Hand Tool	Optional Bench Mount Tool	Optional Bench Arbor Press	Housing Color
12-14	19045-1000 (COC-1)	19285-0074	N/A	64006-0200	White

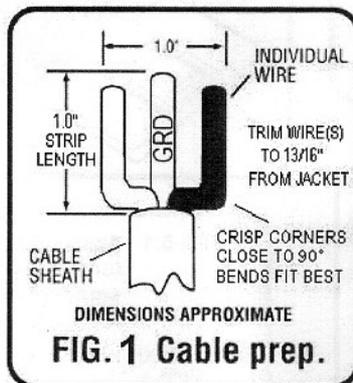


Reference Information

UL File Number: E182087,
CSA File Number: LR18689-C53
NEC Article: 550, 551, and 545
HUD Section: 3280.801
Current: 20A, Voltage: 300V

Installation Procedure:

- Carefully strip and prepare the wires to the configuration as shown in **Figure 1** using helpful hints shown in photographs of **Figure 2**.
- Hold the clear strain relief cover with bottom facing upward as shown in **Figure 3**.
- Lay wire into locator slots, making sure the black wire is placed into the polarization slot as shown in **Figure 3**.
- Press the cable sheath into the integral strain relief slot as shown in **Figure 3**. Trimming of ground wire and possibly others will be necessary. Wires must not extend beyond the locators as shown in **Figure 4**!
- While holding the strain relief cover, position the housing's hinge posts into the hinge slots and press down until both lock into place as shown in **Figure 4**.
- Close the strain relief cover and housing by hand. Place the connector assembly into Molex tool (preferred) as shown in **Figure 5**. Squeeze the tool until the connector bottoms out and the locking latches engage on both sides. OR alternately, squeeze the top and bottom closed with tongue and groove pliers as shown in **Figure 5.1**. Pliers must be a minimum of 10" long. Squeeze firmly on both sides, squarely across the connector between ribs A and B to ensure wires seat completely into slots.
- Inspect the connector to ensure the wires have been properly engaged into the housing assembly contacts. A properly terminated wire is fully seated into its proper slots with no significant bow of the cover. If the wires extend past the insulation stops, the wires must be re-terminated with a NEW CONNECTOR. Once the cover has been closed the connector cannot be re-used. Failure to comply with this procedure may result in the failure of the connector.
- Mating and un-mating the completed connector is illustrated in **Figure 6**.

FIG. 2

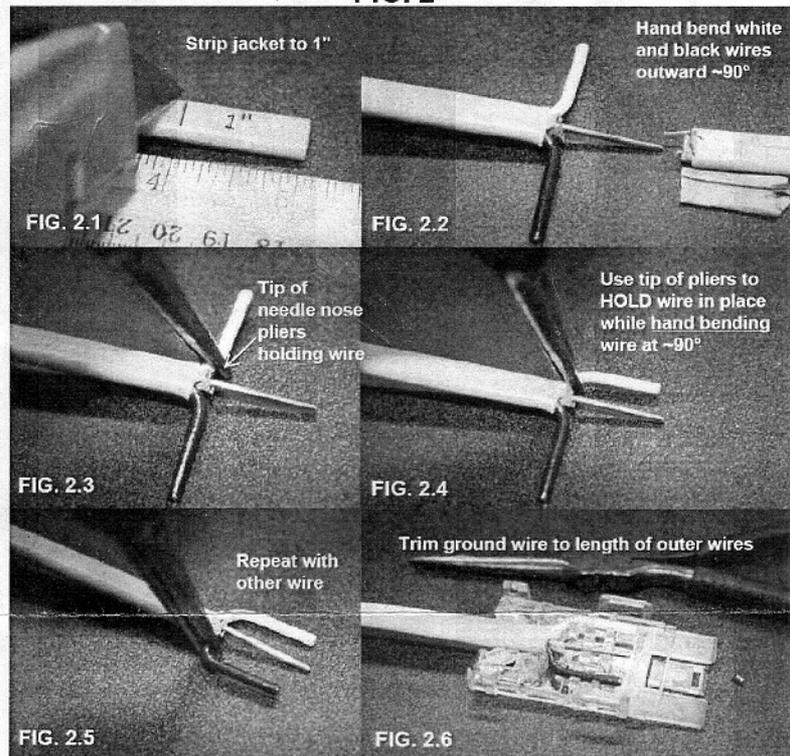

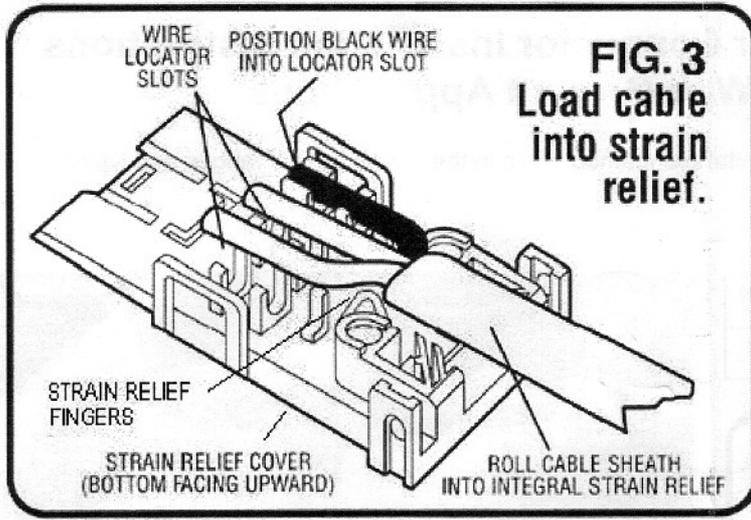


FIG. 3
Load cable
into strain
relief.

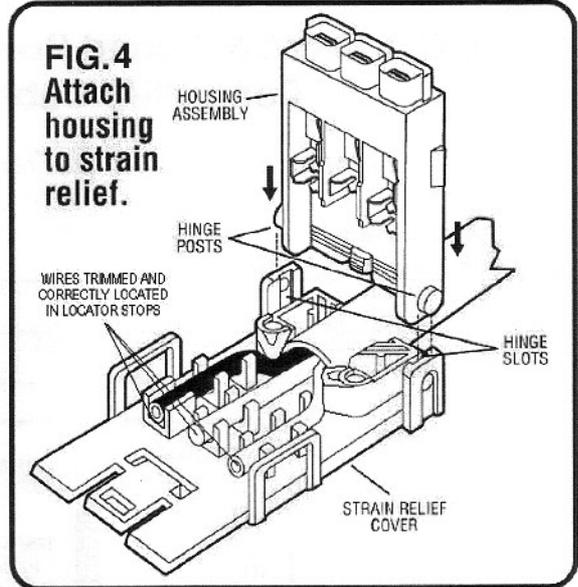


FIG. 4
Attach
housing
to strain
relief.

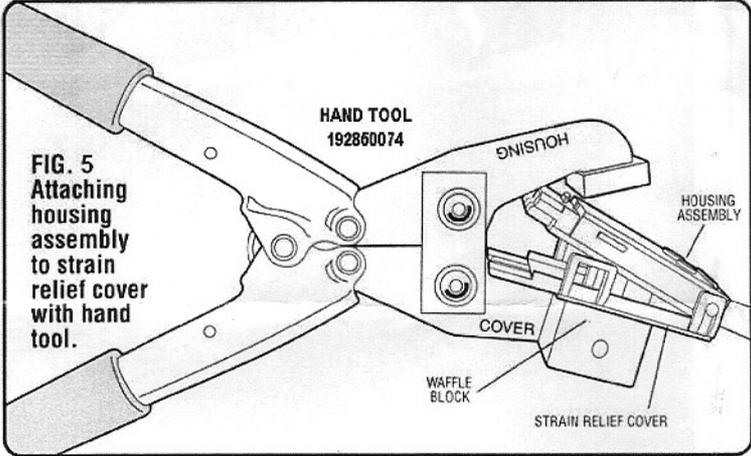


FIG. 5
Attaching
housing
assembly
to strain
relief cover
with hand
tool.

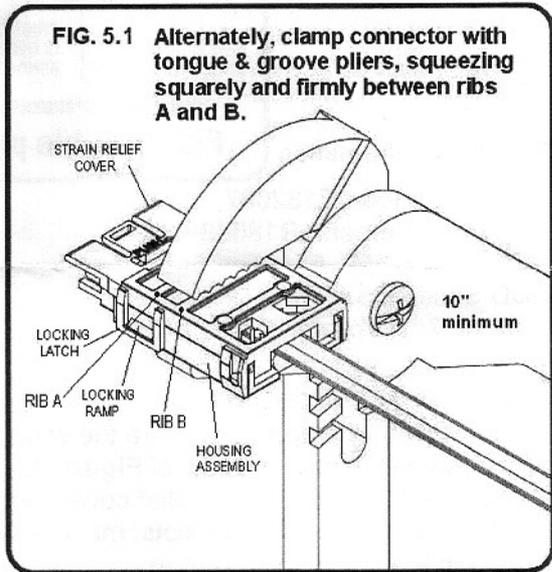


FIG. 5.1 Alternately, clamp connector with tongue & groove pliers, squeezing squarely and firmly between ribs A and B.

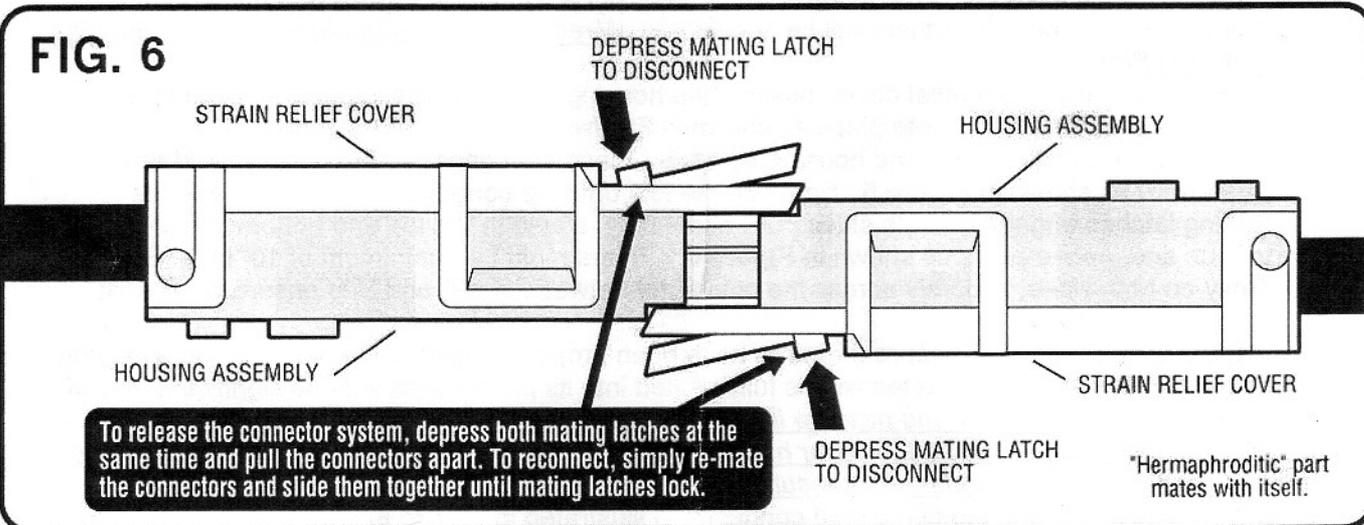


FIG. 6

To release the connector system, depress both mating latches at the same time and pull the connectors apart. To reconnect, simply re-mate the connectors and slide them together until mating latches lock.

"Hermaphroditic" part mates with itself.